


FOLDING BEACH HAMMOCK MANUAL

Snap frame tubes together by sliding narrower ends of tubes into larger tubes. Make sure that each pushpin pops completely into its matching hole. Please refer to picture below for assembly steps. Pull assembled hammock tubes apart so that to provide reliable support. Adjust straps if necessary to provide adequate width between support tubes for best support. Attach hammock fabric loops over hook bolts and you are ready to use hammock.

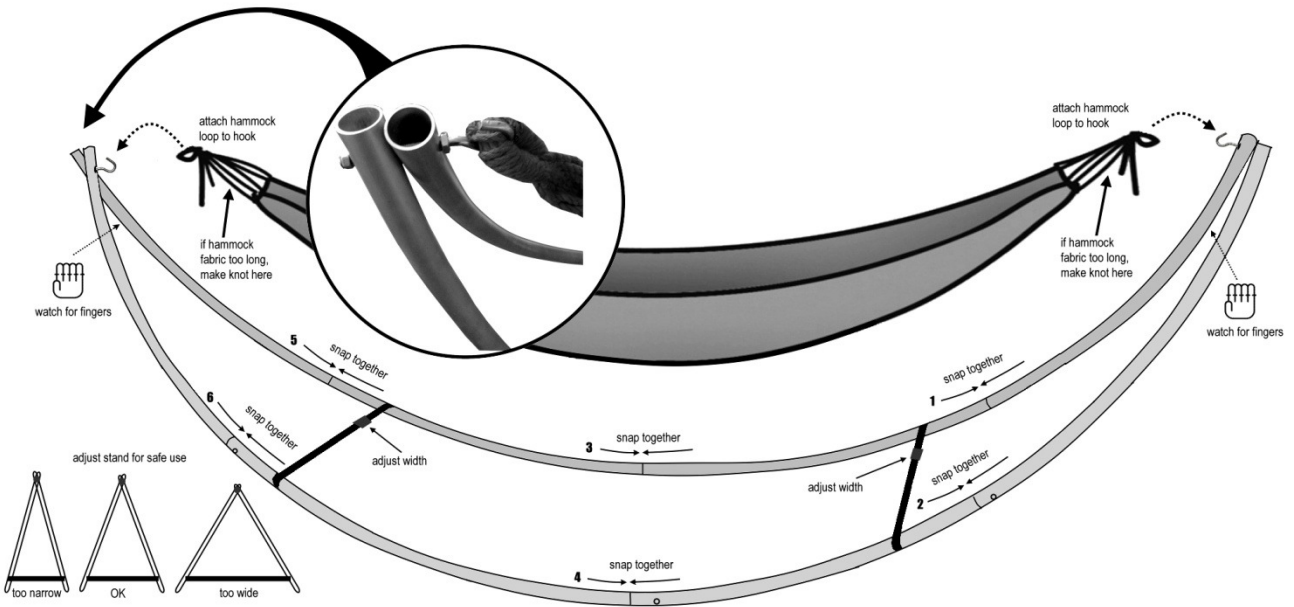

- Do not overload hammock. Maximum safe capacity is 200 lbs. Do not use of by more than 1 person. Do not jump inside the hammock.
- This hammock is not a toy. Do not rock too violently, otherwise hammock stand can overturn and injure its occupant.
- To minimize risk of injury, please do not rock hammock when placed upon a hard surface, such as pavement, tiles or cement floor.
- When assembling/disassembling hammock, please make sure that there is no other people close to you that you may accidentally injure.
- Strong wind can overturn freely standing hammock. Please either rotate it along the wind or place some load inside the hammock.
- Use WD40 on joint points to make assembly and disassembly easier. Keep joint points clean from sand and debris when possible.
- If pushpins seems to be stuck and difficult to push on for disassembly, please stand at one end of hammock and shake it up and down few times in order to loosen up the connection between tubes, then hold tube on both sides of joint and try to move up and down to loosen up even more. Then press on pushpin and pull tubes in opposing directions while turning tubes against each other.
- If hammock fabric hanging too low, then make a knot on one or both sides of hammocks near the loops to shorten hammock length.
- **! WARNING!** Watch your fingers during assembly to avoid being pinched by moving parts.

HOW TO GET INTO THE HAMMOCK:

