



## 9.6' SD290 Saturn Inflatable Boat

The 9'6" SATURN Inflatable boat SD290 is excellent as a tender for a yacht or sailboat or as a life raft in case of an emergency. SD290 inflatable dinghies take up to a 10 HP short shaft outboard motor and can carry up to 4 people maximum.

A reliable inflatable dinghy is about the most important piece of equipment that a experienced cruiser can own. With a 10 HP outboard motor this boat will fly over the water at a speed of 20 mph.

Our inflatable boats are made of 1100 denier Korean PVC fabric with polyester support that has excellent resistance to tearing, tension and breaking. It is a much more heavy-duty PVC fabric than most of our competitors with 1000 denier PVC boats.

### SATURN SD290 FEATURES:

- All around rope grab line.
- Separate internal air chambers.
- One-way drain valve with plug.
- All around, durable rubber strike.
- Safety valve to prevent over inflation.
- Stainless steel D-rings for easy towing.
- Reliable flat air valves with pushpin design.
- Front bow D-ring with integral lifting handle.
- Spare rope for attaching anchor is included.
- Double layer of fabric at the bottom of tubes.
- High-pressure drop stitch air floor is included.
- Deep inflatable V-keel with a rub strake protector.
- Extremely rigid, lightweight hull for excellent performance.
- Lightweight and strong removable aluminum seat benches.
- Free second bench is included when order is placed on-line!
- Heavy-duty marine grade plywood transom for outboard motor.
- Equipment: aluminum oars, repair kit, seat bench and carry bag.
- Free, complimentary generic high-volume hand pump is included.

### New features further improve inflatable boats durability and practicality:

- Air valves have been moved toward the inside of boat's tubes and away from direct exposure to the elements. This will allow easier inflation from inside the boat and will minimize damage caused by sun and rain while the boat is stored uncovered for prolonged periods of time. Rain water will not accumulate inside the valves.
- Triangular symmetrical splash guards were installed on the transom corners to provide the sensitive transom of an uncovered boat with additional protection and shade from the elements throughout extended periods in Tropical environments.



**Tech Specs\***

**Overall Length**

**Inside Length**

**Overall Width**

**Inside Width**

**Tube Diameter**

**Chambers**

**Person Capacity**

**Loading Capacity**

**Max Motor Power**

**Tube Weight**

**Shipping Size**

**Shipping Weight**

**Floor Type**

**Material**

**Seams**

**Air Valves**

**Speed (approx.)**

**Inflation & Assembly**

**SD290**

9.6'

6.0'

5.4'

2.4'

16.5"

3+1+1

4

992 lbs

10 HP (15" shaft / 100 lbs)

85 lbs

45 x 24 x 13"

95 lbs

Drop Stitch Air Floor


1100 Denier Reinforced PVC

Quadruple Overlap

Recessed One-Way

17 mph (10HP w/2 adults)

20 min.

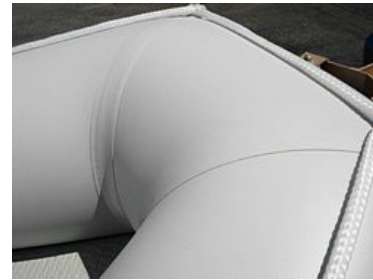

**Order On-line at [www.BoatsToGo.com](http://www.BoatsToGo.com) TOLL FREE 1-866-299-7740 M-F 10-6 ET**